

# 4/2- and 4/3-way proportional directional valves, direct operated, without electrical position feedback, without/with integrated electronics (OBE)

**RE 29055/10.05**  
Replaces: 08.01


1/16

## Types 4WRA and 4WRAE

Nominal sizes 6 and 10  
Component series 2X  
Maximum operating pressure 315 bar  
Maximum flow: 42 l/min (NS6)  
75 l/min (NS10)



Type 4WRAE 6 ...-2X/G24K31/V  
with integrated electronics (OBE)

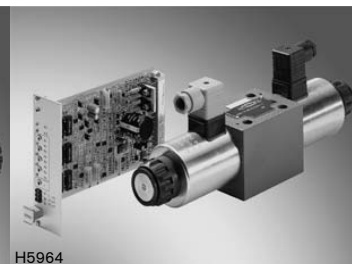

Typ 4WRA 10 ...-2X/G24...K4/V  
with plug-in connectors and  
associated control electronics  
(separate order)

## Overview of contents




| Contents                                    | Page     |
|---------------------------------------------|----------|
| Features                                    | 1        |
| Ordering details                            | 2        |
| Symbols                                     | 3        |
| Function, section                           | 4        |
| Technical data                              | 5, 6     |
| Control electronics                         | 6        |
| Electrical connections, plug-in connectors  | 7        |
| Integrated electronics (OBE) for type 4WRAE | 8        |
| Characteristic curves                       | 9...11   |
| Unit dimensions                             | 12 ...15 |

## Features

- Direct operated proportional directional valve without electrical position feedback and integrated electronics (OBE) for type 4WRAE
- Control the direction and magnitude of a flow
- Actuation by means of proportional solenoids with central thread and removable coil
- For subplate mounting:
  - Connection position to ISO 4401
  - Subplates to catalogue sheets RE 45052 (NS6) or RE 45054 (NS10) separate order, see page 12 to 15
- Spring centred control spool
- Control electronics
  - 4WRAE:
    - integrated electronics (OBE) with voltage input or current input (A1 resp. F1)
  - 4WRA:
    - digital or analogue amplifier in Eurocard format (separate order)
    - analogue module amplifier

For information regarding the available spare parts see:  
[www.boschrexroth.com/spc](http://www.boschrexroth.com/spc)

Ordering details

|                                                                                                                                                     |  |                                                                                     |  |            |  |   |  |                                                                                                                                           |   |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------|--|------------|--|---|--|-------------------------------------------------------------------------------------------------------------------------------------------|---|
| 4WRA                                                                                                                                                |  |                                                                                     |  | -2X/ G24   |  | / |  | V                                                                                                                                         | * |
| Without integrated electronics (OBE)                                                                                                                |  | = No code                                                                           |  |            |  |   |  | Further details in clear text                                                                                                             |   |
| With integrated electronics (OBE)                                                                                                                   |  | = E                                                                                 |  |            |  |   |  | Seal material                                                                                                                             |   |
| Nominal size 6                                                                                                                                      |  | = 6                                                                                 |  |            |  |   |  | V = FKM seals, suitable for mineral oil (HL, HLP) to DIN 51524                                                                            |   |
| Nominal size 10                                                                                                                                     |  | = 10                                                                                |  |            |  |   |  | Electronic interfaces A1 or F1 for 4WRAE                                                                                                  |   |
| Spool symbols                                                                                                                                       |  |                                                                                     |  |            |  |   |  | A1 = Command value input ± 10 V<br>F1 = Command value input 4 to 20 mA<br>No code = For 4WRA                                              |   |
|                                                                     |  |    |  | = E<br>E1- |  |   |  | Electrical connections for 4WRA:                                                                                                          |   |
|                                                                     |  |    |  | = W<br>W1- |  |   |  | K4 <sup>2)</sup> = Without plug-in connector, with component plug to DIN EN 175301-803<br>plug-in connector – separate order, see page 7  |   |
|                                                                    |  |    |  | = EA       |  |   |  | for 4WRAE:                                                                                                                                |   |
|                                                                   |  |  |  | = WA       |  |   |  | K31 <sup>2)</sup> = Without plug-in connector, with component plug to DIN EN 175201-804<br>plug-in connector – separate order, see page 7 |   |
| With spool symbols E1– and W1–:                                                                                                                     |  |                                                                                     |  |            |  |   |  | Special protection                                                                                                                        |   |
| P → A: $q_{V\max}$                                                                                                                                  |  | B → T: $q_V/2$                                                                      |  |            |  |   |  | No code = Without special protection                                                                                                      |   |
| P → B: $q_V/2$                                                                                                                                      |  | A → T: $q_{V\max}$                                                                  |  |            |  |   |  | J <sup>1)</sup> = Sea water resistant (only for NS6)                                                                                      |   |
| Note:                                                                                                                                               |  |                                                                                     |  |            |  |   |  | For details regarding the sea water resistant versions see RE 29055-M                                                                     |   |
| With spools W and WA, in the neutral position, there is a connection from A to T and B to T with approx. 3 % of the relevant nominal cross-section. |  |                                                                                     |  |            |  |   |  | G24 = Supply voltage 24 VDC                                                                                                               |   |
|                                                                                                                                                     |  |                                                                                     |  |            |  |   |  | 2X = Component series 20 to 29 (20 to 29: unchanged installation and connection dimensions)                                               |   |
|                                                                                                                                                     |  |                                                                                     |  |            |  |   |  | Nominal flow at a valve pressure differential $\Delta p = 10$ bar                                                                         |   |
|                                                                                                                                                     |  |                                                                                     |  |            |  |   |  | NS6                                                                                                                                       |   |
|                                                                                                                                                     |  |                                                                                     |  |            |  |   |  | 07 = 7 l/min                                                                                                                              |   |
|                                                                                                                                                     |  |                                                                                     |  |            |  |   |  | 15 = 15 l/min                                                                                                                             |   |
|                                                                                                                                                     |  |                                                                                     |  |            |  |   |  | 30 = 26 l/min                                                                                                                             |   |
|                                                                                                                                                     |  |                                                                                     |  |            |  |   |  | NS10                                                                                                                                      |   |
|                                                                                                                                                     |  |                                                                                     |  |            |  |   |  | 30 = 30 l/min                                                                                                                             |   |
|                                                                                                                                                     |  |                                                                                     |  |            |  |   |  | 60 = 60 l/min                                                                                                                             |   |


<sup>1)</sup> Other types of electrical protection on request

<sup>2)</sup> Only for NS6: for version "J" = sea water resistant only state "K31"!


## Symbols

### Without integrated electronics

Type 4WRA...




Types 4WRA...**EA**...; 4WRA...**WA**...




### With integrated electronics (OBE)

Type 4WRAE...

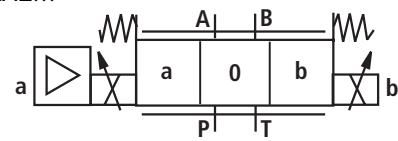

Types 4WRAE...**EA**...; 4WRAE...**WA**...



## Function, section

The 4/2- and 4/3-way proportiona directional valves are designed as direct operated components for subplate mounting. They are actuated by means of proportional solenoids with central thread and removable coil. The solenoids are controlled either by external control electronics (type 4WRA) or by integrated control electronics (type 4WRAE).

### Design:


The valves basically consist of:

- Housing (1) with mounting surface
- Control spool (2) with compression springs (3 and 4)
- Solenoids (5 and 6) with central thread
- Optional integrated electronics (7)


### Function:

- With the solenoids (5 and 6) de-energised, the control spool (2) is held in the central position by compression springs (3 and 4)
- Direct actuation of the control spool (2) by energising a proportional solenoid  
E.g. energisation of solenoid "b" (6)  
→ The control spool (2) is moved to the left in proportion to the electrical input signal  
→ connection from P to A and B to T via orifice-like cross-sections with progressive flow characteristics
- De-energisation of the solenoid (6)  
→ The control spool (2) is returned to the central position by compression spring (3)

Type 4WRA 6...-2X/...

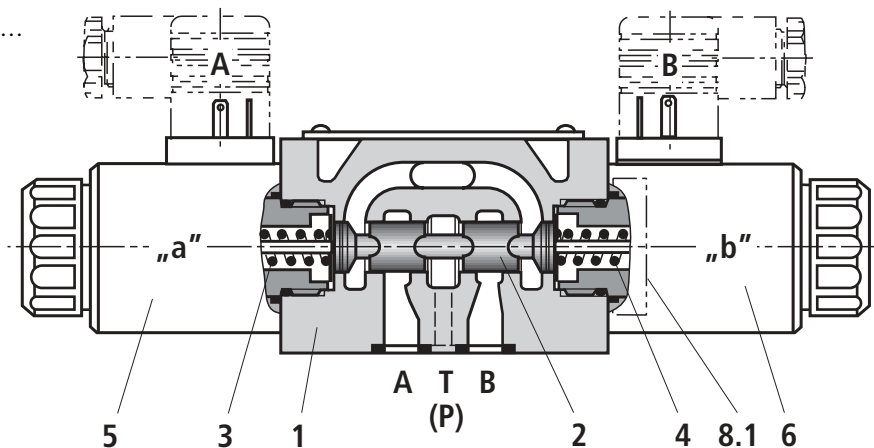

Type 4WRAE 10...-2X/...

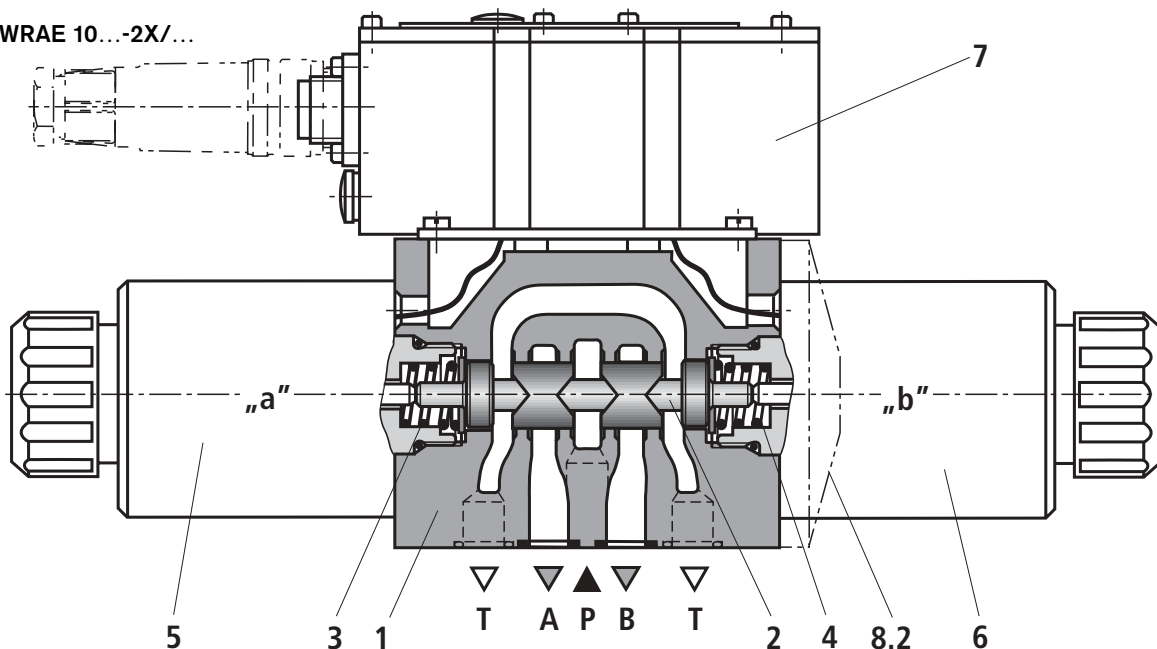

### Valve with 2 spool positions:

(Type 4WRA...A...)

In principle, the function of this valve version corresponds to that of the valve with 3 spool positions. However, the valves with 2 spool positions are **only fitted with solenoid "a"**. Instead of the 2nd proportional solenoid a plug (8.1) is fitted for NS 6 or for NS 10 a cover (8.2).

### Note for type 4WRA 6...-2X/...:

Draining of the tank line is to be avoided. With the appropriate installation conditions, a back pressure valve is to be installed (back pressure approx. 2 bar).

**Technical data** (for applications outside these parameters, please consult us!)**General**

|                           |          |                                 |           |
|---------------------------|----------|---------------------------------|-----------|
| Nominal size              | NS       | <b>6</b>                        | <b>10</b> |
| Installation              |          | optional, preferably horizontal |           |
| Storage temperature range | °C       | -20 to +80                      |           |
| Ambient temperature range | 4WRA °C  | -20 to +70                      |           |
|                           | 4WRAE °C | -20 to +50                      |           |
| Weight                    | 4WRA kg  | 2.0                             | 6.6       |
|                           | 4WRAE kg | 2.2                             | 6.8       |

**Hydraulic** (measured with HLP46,  $\vartheta_{oil} = 40\text{ °C} \pm 5\text{ °C}$ )

|                                                                                              |               |                    |                                                                         |
|----------------------------------------------------------------------------------------------|---------------|--------------------|-------------------------------------------------------------------------|
| Max. operating pressure                                                                      | Ports A, B, P | bar                | 315                                                                     |
|                                                                                              | Port T        | bar                | 210                                                                     |
| Nominal flow $q_{V\text{ nom}}$ at $\Delta p = 10\text{ bar}$                                |               | l/min              | 7, 15, 26      30, 60                                                   |
| Max. permissible flow                                                                        |               | l/min              | 42 (80) <sup>1)</sup> 75 (140) <sup>1)</sup>                            |
| Pressure fluid                                                                               |               |                    | mineral oil (HL, HLP) to DIN 51524<br>other pressure fluids on request! |
| Pressure fluid temperature range                                                             |               | °C                 | -20 to +80 (preferably +40 to +50)                                      |
| Viscosity range                                                                              |               | mm <sup>2</sup> /s | 20 to 380 (preferably 30 to 46)                                         |
| Max. permissible degree of pressure fluid contamination<br>cleanliness class to ISO 4406 (c) |               |                    | class 20/18/15 <sup>2)</sup>                                            |
| Hysteresis                                                                                   |               | %                  | ≤ 5                                                                     |
| Reversal error                                                                               |               | %                  | ≤ 1                                                                     |
| Response sensitivity                                                                         |               | %                  | ≤ 0.5                                                                   |

<sup>1)</sup> Max. permissible flow with a dual flow path

<sup>2)</sup> The cleanliness class stated for the components must be adhered too in hydraulic systems. Effective filtration prevents faults from occurring and at the same time increases the component service life.  
For the selection of filters see catalogue sheets RE 50070, RE 50076, RE 50081, RE 50086 and RE 50088.

**Technical data** (for applications outside these parameters, please consult us!)**Electrical**

|                                     |                     |                                                                  |           |
|-------------------------------------|---------------------|------------------------------------------------------------------|-----------|
| Nominal size                        | NS                  | <b>6</b>                                                         | <b>10</b> |
| Voltage type                        |                     | DC                                                               |           |
| Command value signal                | Voltage input „A1“  | V                                                                | ±10       |
| with type WRAE                      | Current input „F1“  | mA                                                               | 4 to 20   |
| Max. current per solenoid           |                     | A                                                                | 2.5       |
| Solenoid coil                       | Cold value at 20 °C | Ω                                                                | 2         |
| resistance                          | Max. warm value     | Ω                                                                | 3         |
| Duty                                |                     | %                                                                | 100       |
| Max. coil temperature <sup>1)</sup> |                     | °C                                                               | 150       |
| Electrical connections              | 4WRA                | with component plug to DIN EN 175301-803 or ISO 4400             |           |
| see page 7                          |                     | plug-in connector to DIN EN 175301-803 or ISO 4400 <sup>2)</sup> |           |
|                                     | 4WRAE               | with component plug to DIN EN 175201-804                         |           |
|                                     |                     | plug-in connector DIN EN 175201-804 <sup>2)</sup>                |           |
| Valve protection to EN 60529        |                     | IP65 with mounted and fixed plug-in connector                    |           |


**Control electronics**

|                           |                                                     |                                              |                               |
|---------------------------|-----------------------------------------------------|----------------------------------------------|-------------------------------|
| For 4WRA                  | Digital amplifier in Eurocard format <sup>2)</sup>  | VT-VSPD-1-2X ( to RE 30523 - middle of 2006) |                               |
|                           | Analogue amplifier in Eurocard format <sup>2)</sup> | VT-VSPA2-1-2X/... to RE 30110                |                               |
|                           | Analogue module amplifier <sup>2)</sup>             | VT-MSPA2-1-1X to RE 30228                    |                               |
| For 4WRAE                 |                                                     | integrated into the valves, see page 8       |                               |
|                           | Analogue command value module                       | VT- SWMA-1-1X/... to RE 29902                |                               |
|                           | Analogue command value module                       | VT-SWMKA-1-1X/... to RE 29903                |                               |
|                           | Digital command value card                          | VT-HACD-1-1X/... to RE 30143                 |                               |
|                           | Analogue command value card                         | VT-SWKA-1-1X/... to RE 30255                 |                               |
| Supply voltage            | Nominal voltage                                     | VDC                                          | 24                            |
| 4WRAE, 4WRA <sup>3)</sup> | Lower limiting value                                | V                                            | 21 / 22 (4WRA);<br>19 (4WRAE) |
|                           | Upper limiting value                                | V                                            | 35                            |
| Amplifier current         | $I_{\max}$                                          | A                                            | 1.8                           |
| consumption               | Max. impulse current                                | A                                            | 3                             |

<sup>1)</sup> Due to the occurring surface temperature of the solenoid coils, the European Standards DIN EN 563 and DIN EN 982 must be taken into account!

<sup>2)</sup> Separate order

<sup>3)</sup> With Bosch Rexroth AG control electronics



**Note:**

For details regarding the **environmental simulation test** covering EMC (electro-magnetic compatibility), climate and mechanical loading see RE 29055-U (declaration regarding environmental compatibility).

## Electrical connection, plug-in connectors

### For type WRA

(without integrated electronics – not for version "J" = sea water resistant)

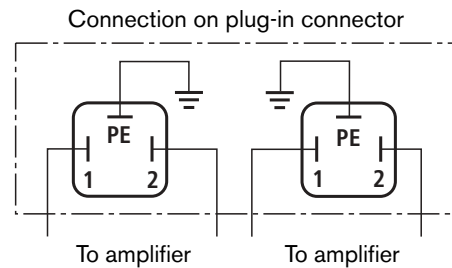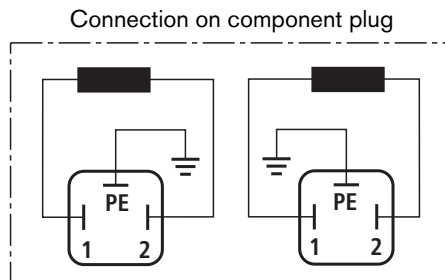


Plug-in connector CECC 75 301-803-A002FA-H3D08-G to DIN EN 175301-803 or ISO 4400

Solenoid **a**, colour grey

Separate order: Material No. **R901017010**

Solenoid **b**, colour black

Separate order: Material No. **R901017011**

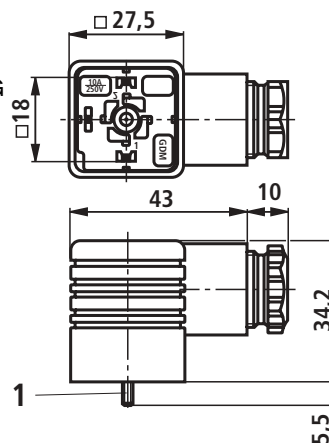

1 Fixing screws M3  
Tightening torque  $M_A = 0.5 \text{ Nm}$

### For type WRAE


(with integrated electronics (OBE) and for version "J" = sea water resistant)

For pin allocation, see block circuit diagram on page 8

Plug-in connector to DIN EN 175201-804

Separate order: Material No. **R900021267**



(plastic version)

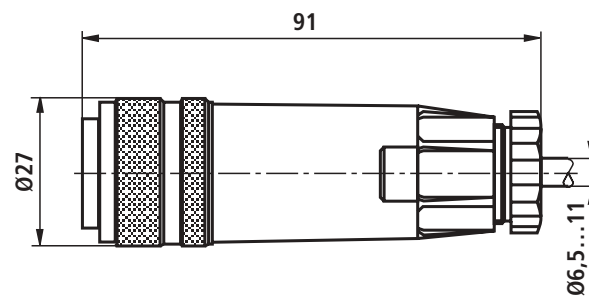

Plug-in connector to DIN EN 175201-804


Separate order: Material No. **R900223890**

(metal version)

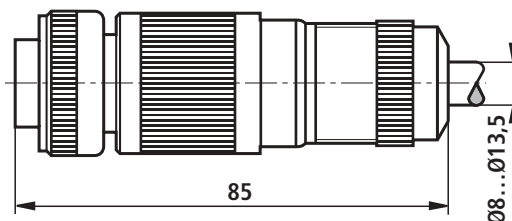

## Integrated electronics (OBE) for type WRAE

### Pin allocation of the component plug



Integrated control electronics (see below)

| Pin allocation               | Contact | Signal                                |
|------------------------------|---------|---------------------------------------|
| Supply voltage               | A       | 24 VDC (19 to 35 VDC)                 |
|                              | B       | GND                                   |
|                              | C       | n.c. <sup>1)</sup>                    |
| Differential amplifier input | D       | Com. value ( $\pm 10$ V / 4 to 20 mA) |
|                              | E       | reference potential                   |
|                              | F       | n.c.                                  |

Com. value: Positive command value (0 to 10 V or 12 to 20 mA) at D and reference potential to E causes flow from P to A and B to T.

Negative command value (0 to – 10 V or 12 to 4 mA) at D and reference potential to E causes flow from P to B and A to T.

For valves with a solenoid on side „A“ (spool variants **EA** and **WA**) a positive command value at D and reference potential to E (NS 6: 4 to 20 mA and NS 10: 12 to 20 mA) causes flow from P to B and A to T.

Connection cable: Recommendation: – up to 25 m cable length type LiYCY 5 x 0.75 mm<sup>2</sup>


– up to 50 m cable length type LiYCY 5 x 1.0 mm<sup>2</sup>

External diameter 6.5 to 11 mm

Connect screen to PE only on the supply side.

<sup>1)</sup> Contacts C and F must not be connected!

### Block circuit diagram / connection allocation

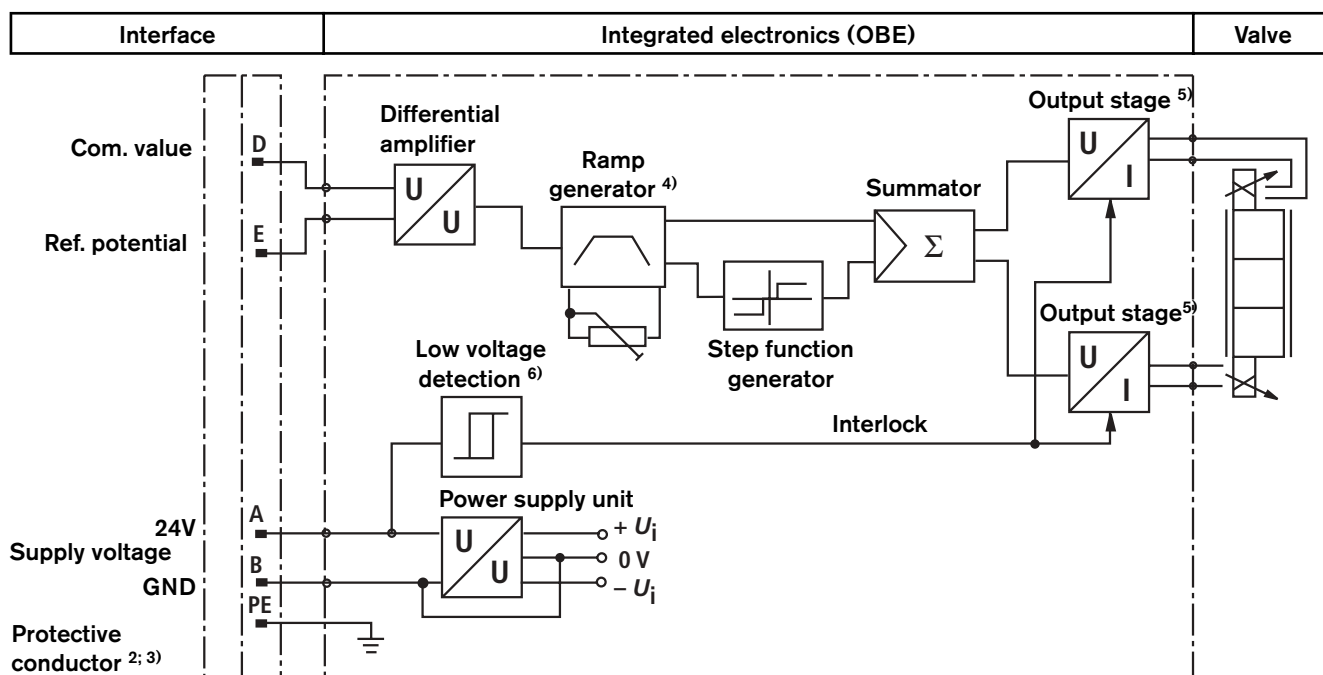


<sup>2)</sup> PE is connected to the cooling body and the valve housing

<sup>3)</sup> Protective conductor screwed to the valve housing and cover




<sup>4)</sup> Ramp can be externally adjusted from 0 to 2.5 s; the same applies for  $T_{up}$  and  $T_{down}$

<sup>5)</sup> Output stages current regulated

<sup>6)</sup> Low voltage detection is **not** carried out for component type 4WRAE 10-2X.

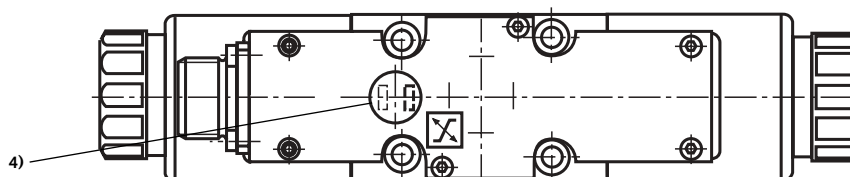


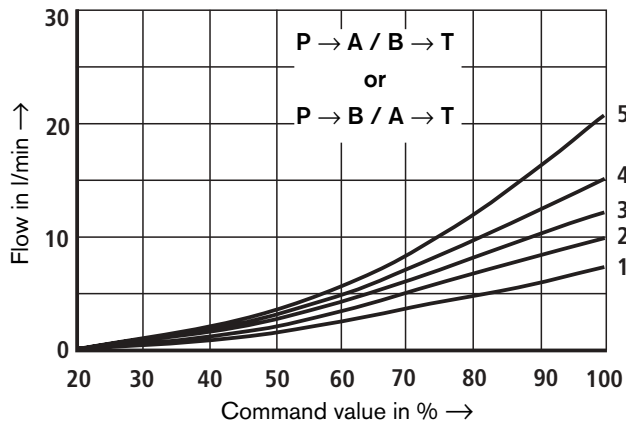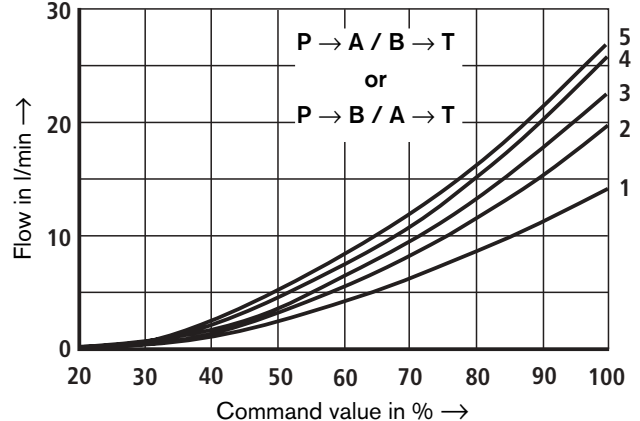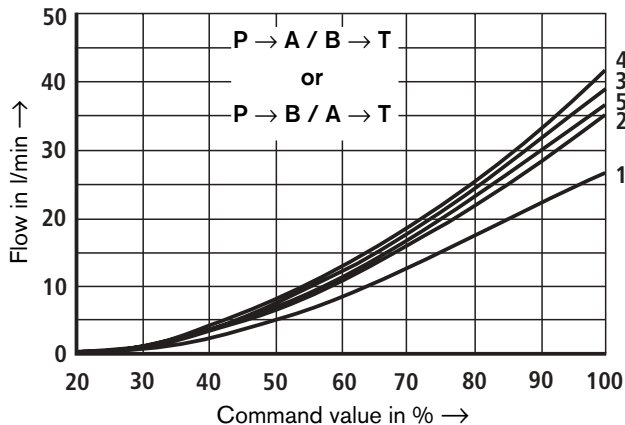


**Characteristic curves** (measured with HLP46,  $\vartheta_{oil} = 40\text{ °C} \pm 5\text{ °C}$ )**NS6****7 l/min nominal flow at 10 bar valve pressure differential****15 l/min nominal flow at 10 bar valve pressure differential****30 l/min nominal flow at 10 bar valve pressure differential**

- 1  $\Delta p = 10\text{ bar}$  constant
- 2  $\Delta p = 20\text{ bar}$  constant
- 3  $\Delta p = 30\text{ bar}$  constant
- 4  $\Delta p = 50\text{ bar}$  constant
- 5  $\Delta p = 100\text{ bar}$  constant

$\Delta p$  = Valve pressure differential (inlet pressure  $p_p$  minus load pressure  $p_L$  and minus return pressure  $p_T$ )

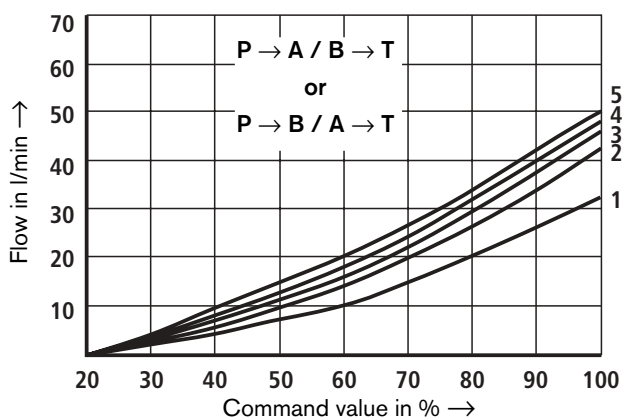**Characteristic curves** (measured with HLP46,  $\vartheta_{oil} = 40\text{ °C} \pm 5\text{ °C}$ )**NS10****30 l/min nominal flow at 10 bar valve pressure differential**

- 1  $\Delta p = 10\text{ bar}$  constant
- 2  $\Delta p = 20\text{ bar}$  constant
- 3  $\Delta p = 30\text{ bar}$  constant
- 4  $\Delta p = 50\text{ bar}$  constant
- 5  $\Delta p = 100\text{ bar}$  constant

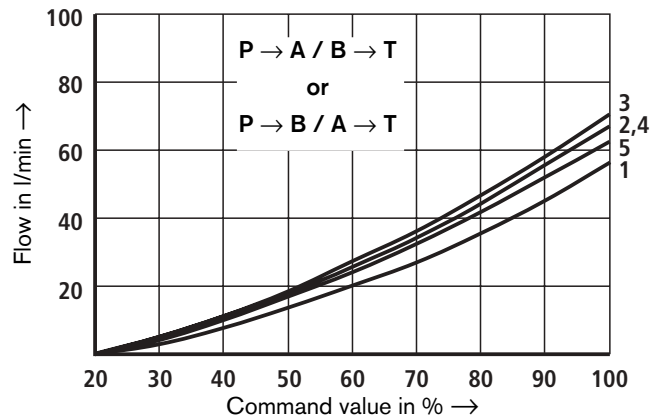**60 l/min nominal flow at 10 bar valve pressure differential**


$\Delta p$  = Valve pressure differential (inlet pressure  $p_p$  minus load pressure  $p_L$  and minus return pressure  $p_T$ )

## Characteristic curves (measured with HLP46, $\vartheta_{oil} = 40\text{ °C} \pm 5\text{ °C}$ )


NS6

Transient functions with stepped form of electrical input signals


### Types 4WRA and 4WRAE

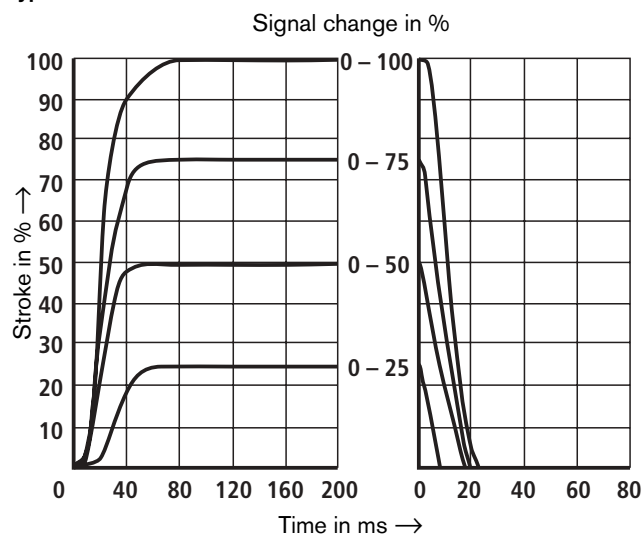


### Performance limit, nominal flow 7 l/min

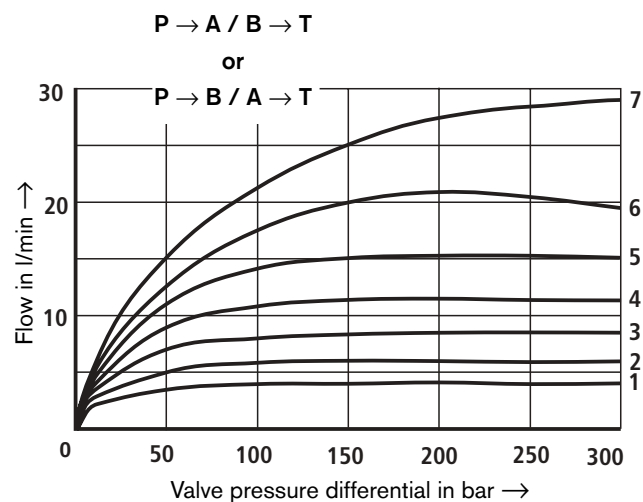

### Performance limit, nominal flow 15 l/min

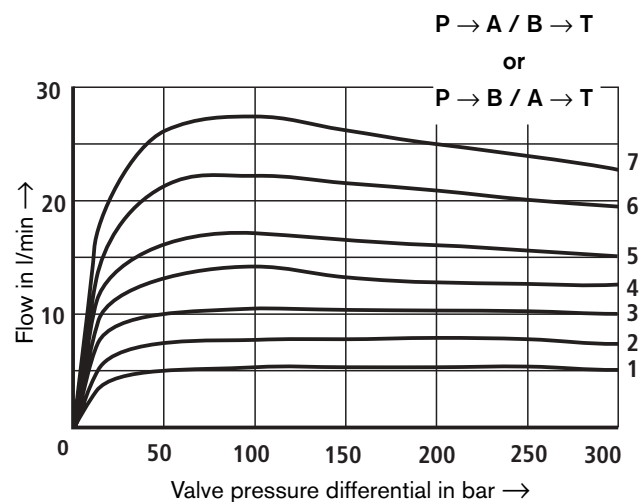

### Performance limit, nominal flow 30 l/min

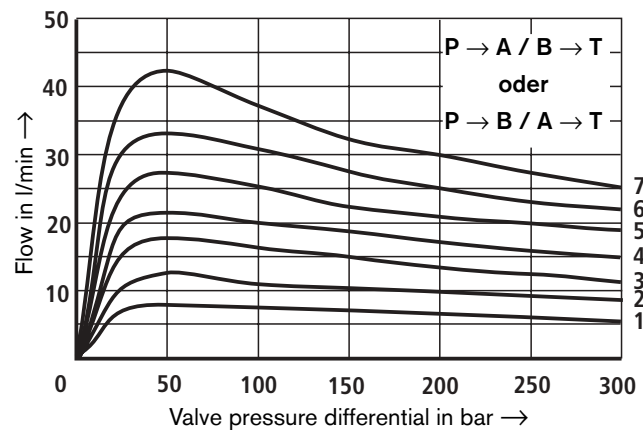


- 1 Com. value = 40 %
- 2 Com. value = 50 %
- 3 Com. value = 60 %
- 4 Com. value = 70 %
- 5 Com. value = 80 %
- 6 Com. value = 90 %
- 7 Com. value = 100 %

If the performance limits are exceeded then flow forces occur which lead to uncontrolled spool movements.


## Characteristic curves (measured with HLP46, $\vartheta_{oil} = 40\text{ °C} \pm 5\text{ °C}$ )

NS10


Transient functions with stepped form of electrical input signals

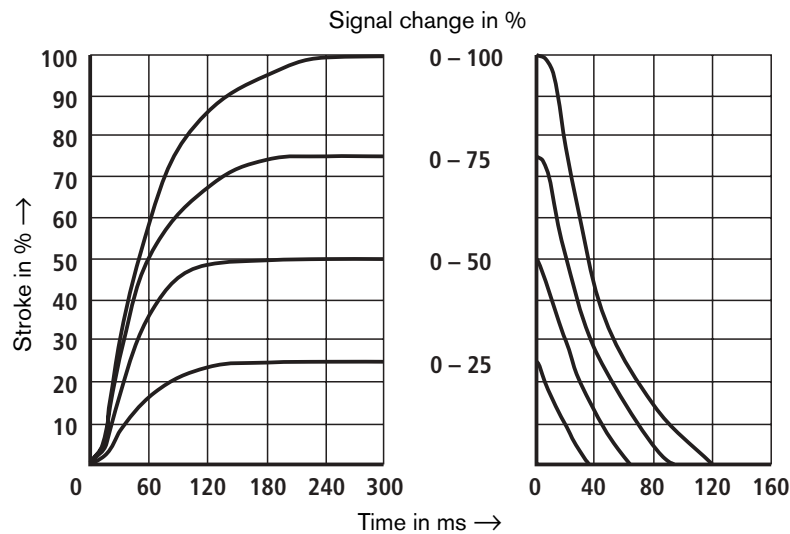

Performance limit, nominal flow 30 l/min

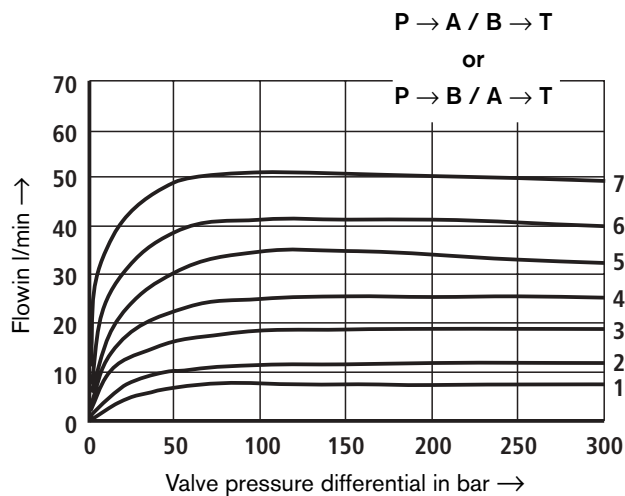

Performance limit, nominal flow 60 l/min

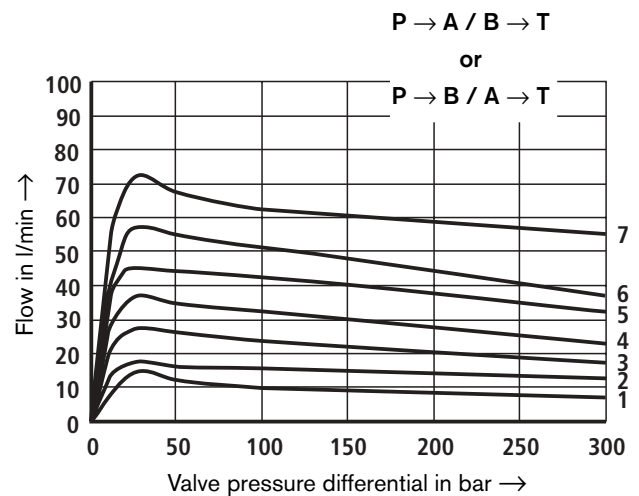


- 1 Com. value = 40 %
- 2 Com. value = 50 %
- 3 Com. value = 60 %
- 4 Com. value = 70 %
- 5 Com. value = 80 %
- 6 Com. value = 90 %
- 7 Com. value = 100 %

If the performance limits are exceeded then flow forces occur which lead to uncontrolled spool movements.

## Unit dimensions: Type 4WRA 6 (nominal dimensions in mm)

NS6

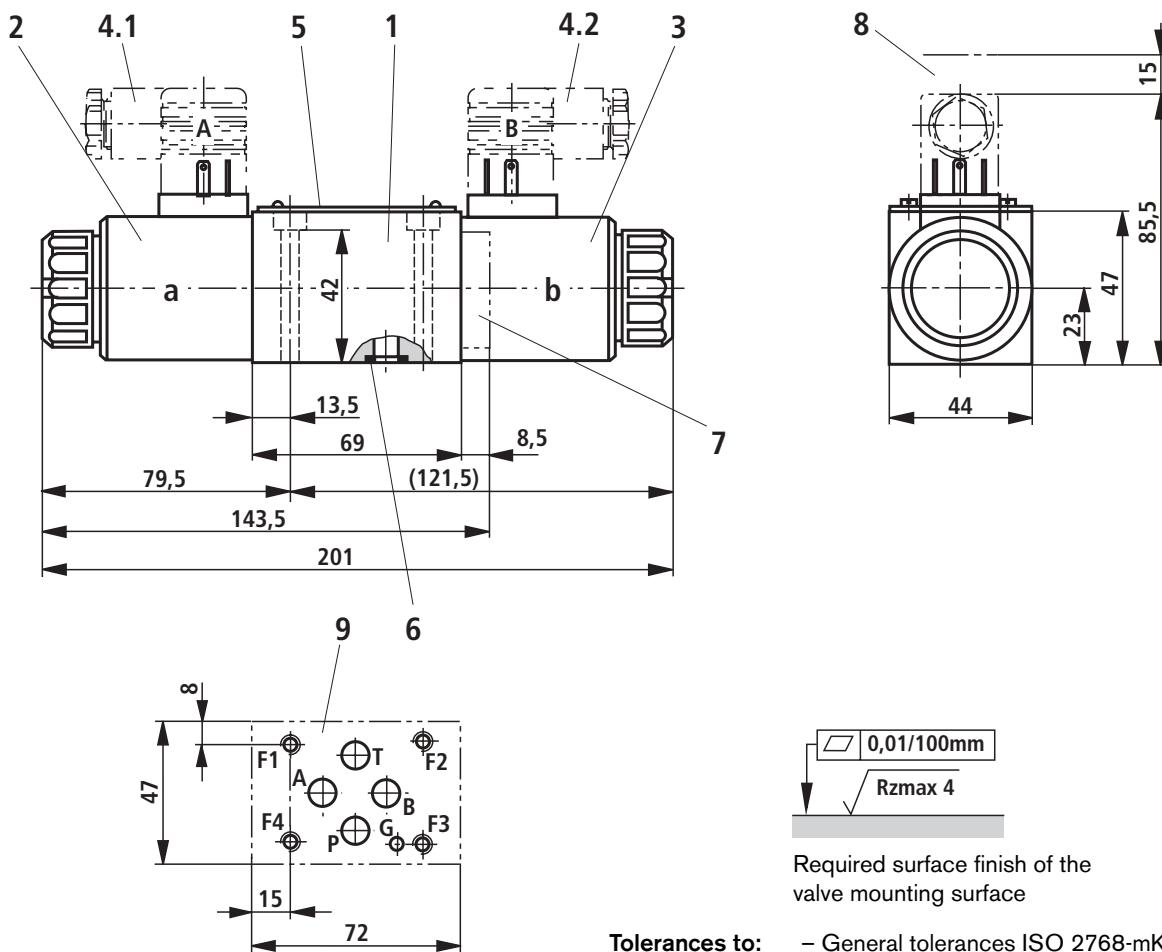

Tolerances to: – General tolerances ISO 2768-mK

- 1 Valve housing
- 2 Proportional solenoid "a"
- 3 Proportional solenoid "b"
- 4.1 Plug-in connector "A", colour grey, separate order, see page 7
- 4.2 Plug-in connector "B", colour black, separate order, see page 7
- 5 Name plate
- 6 Identical seal rings for ports A, B, P and T
- 7 Plug for valves with one solenoid (2 switched positions, versions **EA** or **WA**)
- 8 Space required to remove the plug-in connector
- 9 Machined valve mounting surface, Connection location to ISO 4401 (**with** locating pin hole) Code: 4401-03-02-0-94 (explanation to ISO 5783) Deviation from the standard:
  - without locating pin hole „G“
  - ports P, A, B and T mit  $\varnothing 8$  mm

Subplates to catalogue sheet RE 45052 and valve fixing screws must be ordered separately.

**Subplates:** G341/01 (G1/4)  
G342/01 (G3/8)  
G502/01 (G1/2)

**Valve fixing screws** (separate order)

The following valve fixing screws are recommended:

## – 4 S.H.C.S. ISO 4762 - M5 x 50 - 10.9-flZn-240h-L

(friction value  $\mu_{\text{total}} = 0.09$  to 0.14)

Tightening torque  $M_A = 7 \text{ Nm} \pm 10\%$

Material No. **R913000064** (separate order)

or


## – 4 S.H.C.S. ISO 4762 - M5 x 50 - 10.9

(friction value  $\mu_{\text{total}} = 0.12$  to 0.17)

Tightening torque  $M_A = 8.9 \text{ Nm} \pm 10\%$

## Unit dimensions: Type 4WRAE 6 ...K31/..V (nominal dimensions in mm)

NS6

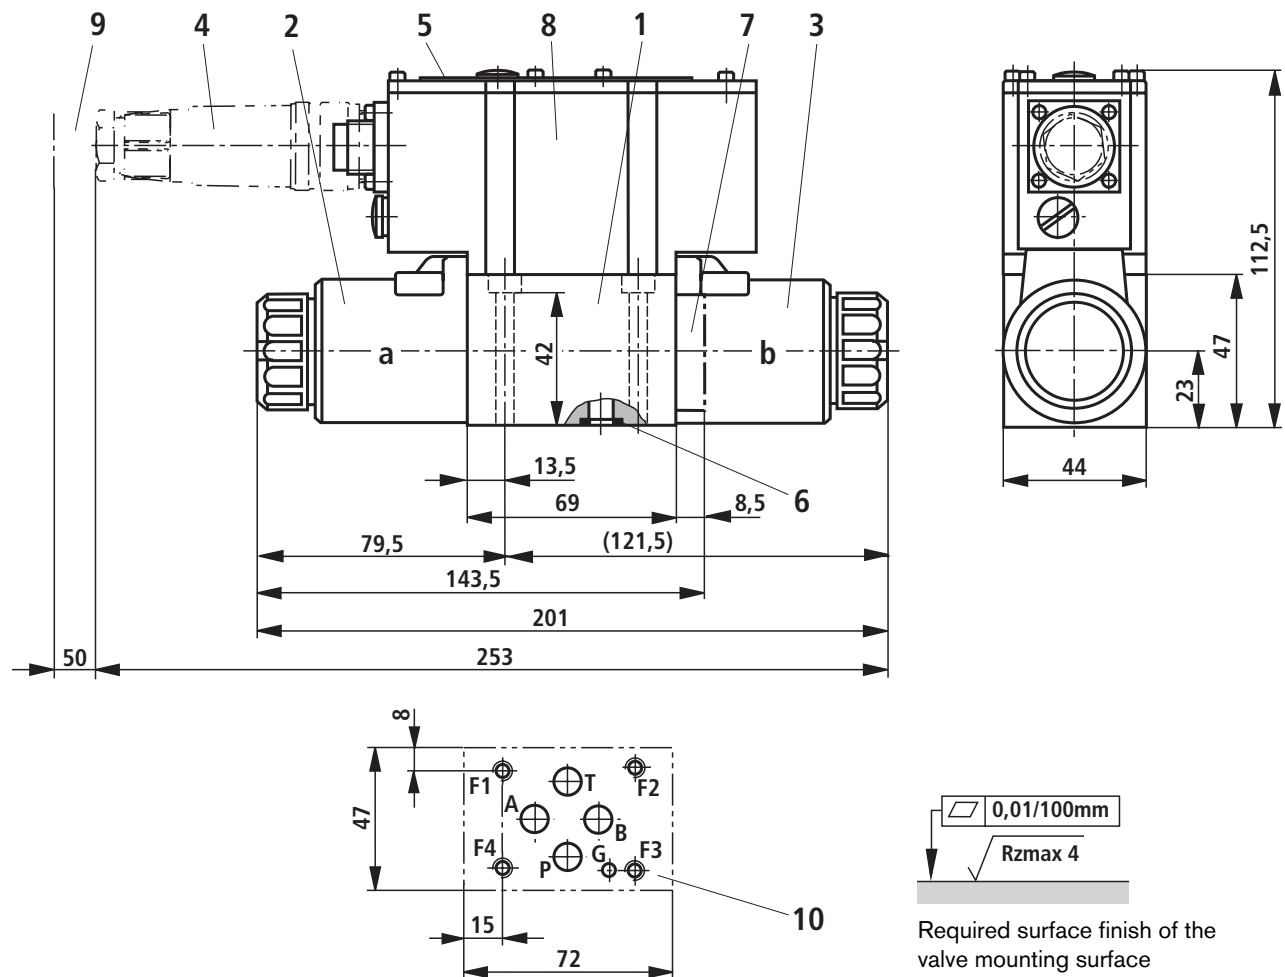

Tolerance to: – General tolerances to ISO 2768-mK

- 1 Valve housing
- 2 Proportional solenoid "a"
- 3 Proportional solenoid "b"
- 4 Plug-in connector to DIN EN 175201-804, separate order, see page 7
- 5 Name plate
- 6 Identical seal rings for ports A, B, P und T
- 7 Plug for valves with one solenoid (2 switched positions, versions **EA** or **WA**)
- 8 Integrated electronics (OBE)
- 9 Space required for the connection cable and to remove the plug-in connector
- 10 Machined valve mounting surface, Connection location to ISO 4401 (**with** locating pin hole) Code: 4401-03-02-0-94 (explanation to ISO 5783) Deviation from the standard:
  - without locating pin hole „G“
  - ports P, A, B and T mit Ø8 mm

Subplates to catalogue sheet RE 45052 and valve fixing screws must be ordered separately.

**Subplates:** G341/01 (G1/4)  
G342/01 (G3/8)  
G502/01 (G1/2)

**Valve fixing screws** (separate order)

The following valve fixing screws are recommended:

– **4 S.H.C.S. ISO 4762 - M5 x 50 - 10.9-flZn-240h-L**

(friction value  $\mu_{\text{total}} = 0.09$  to  $0.14$ )

Tightening torque  $M_A = 7 \text{ Nm} \pm 10\%$

Material No. **R913000064** (separate order)

or


– **4 S.H.C.S. ISO 4762 - M5 x 50 - 10.9**

(friction value  $\mu_{\text{total}} = 0.12$  to  $0.17$ )

Tightening torque  $M_A = 8.9 \text{ Nm} \pm 10\%$

## Unit dimensions: Type 4WRA 10 (nominal dimensions in mm)

NS10

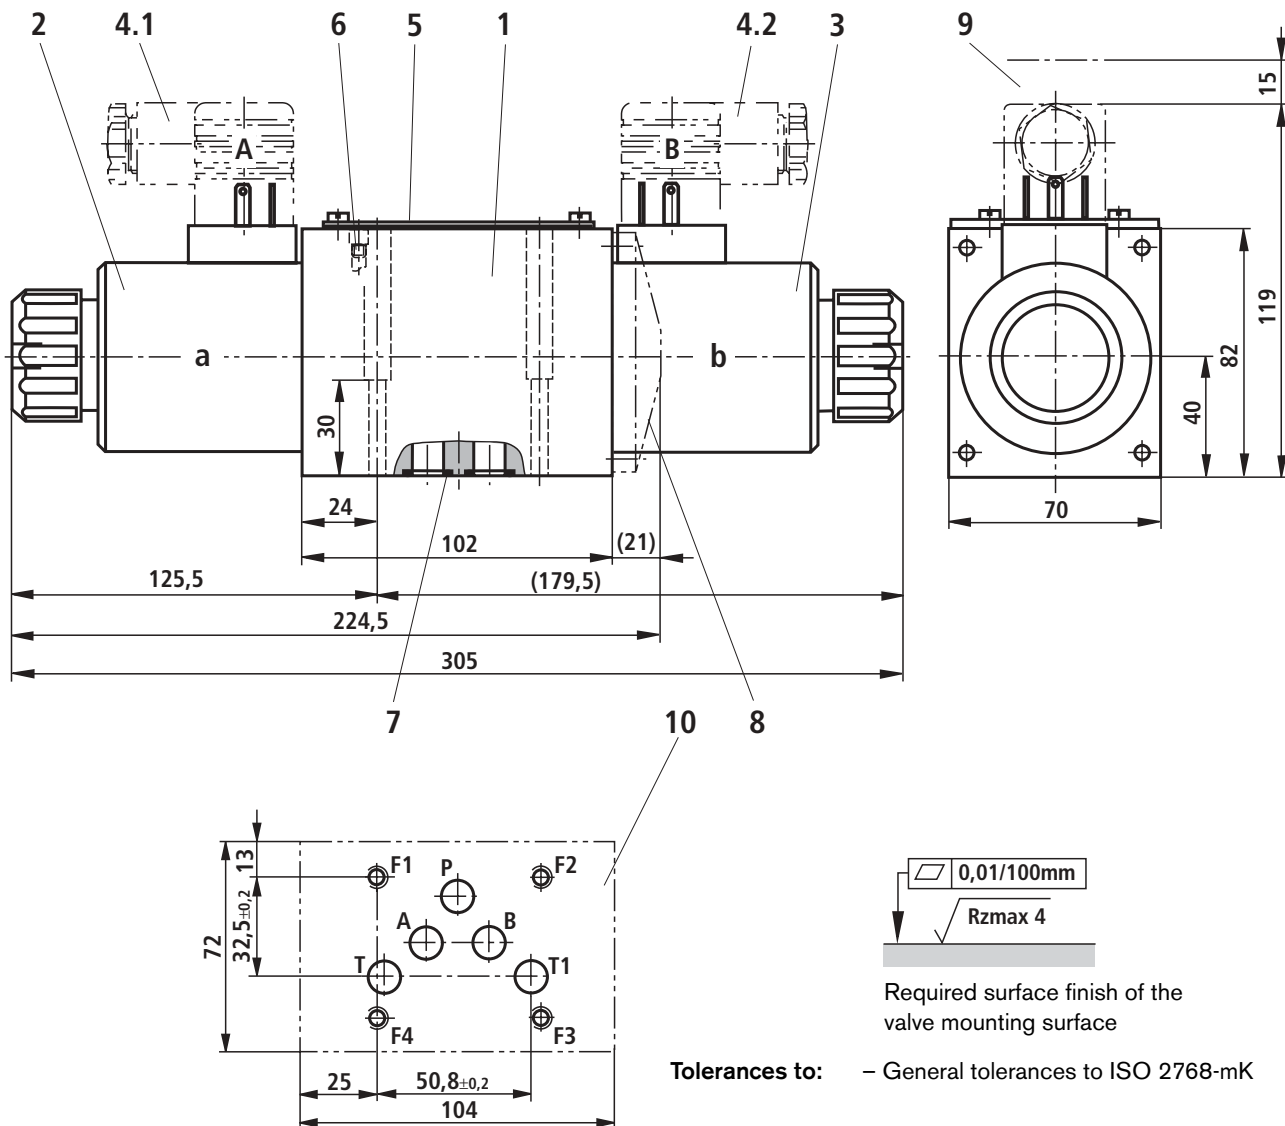

- 1 Valve housing
- 2 Proportional solenoid "a"
- 3 Proportional solenoid "b"
- 4.1 Plug-in connector "A", colour grey, separate order, see page 7
- 4.2 Plug-in connector "B", colour black, separate order, see page 7
- 5 Name plate
- 6 Valve bleed screw  
**Note:** The valves are bled before delivery.
- 7 Identical seal rings for ports A, B, P and T (T1)
- 8 Cover for valves with one solenoid (2 switched positions, versions **EA** or **WA**)
- 9 Space required to remove the plug-in connector
- 10 Machined valve mounting surface, Connection location to ISO 4401 (**with** locating pin hole)  
Code: 4401-05-04-0-94 (explanation to ISO 5783)  
Deviation from the standard: Port T1 Ø11.2 mm

Subplates to catalogue sheet RE 45054 and valve fixing screws must be ordered separately.

**Subplates:** G66/01 (G3/8)  
G67/01 (G1/2)  
G534/01 (G3/4)

**Valve fixing screws** (separate order)

The following valve fixing screws are recommended:


– **4 S.C.H.S. ISO 4762 - M6 x 40 - 10.9-flZn-240h-L**  
(friction value  $\mu_{\text{total}} = 0.09$  to  $0.14$ )  
Tightening torque  $M_A = 12.5 \text{ Nm} \pm 10\%$ ,  
Material No. **R913000058** (separate order)

or

– **4 S.C.H.S. ISO 4762 - M6 x 40 - 10.9**  
(friction value  $\mu_{\text{total}} = 0.12$  to  $0.17$ )  
Tightening torque  $M_A = 15.5 \text{ Nm} \pm 10\%$

## Unit dimensions: Type 4WRAE 10 (nominal dimensions in mm)

NS10

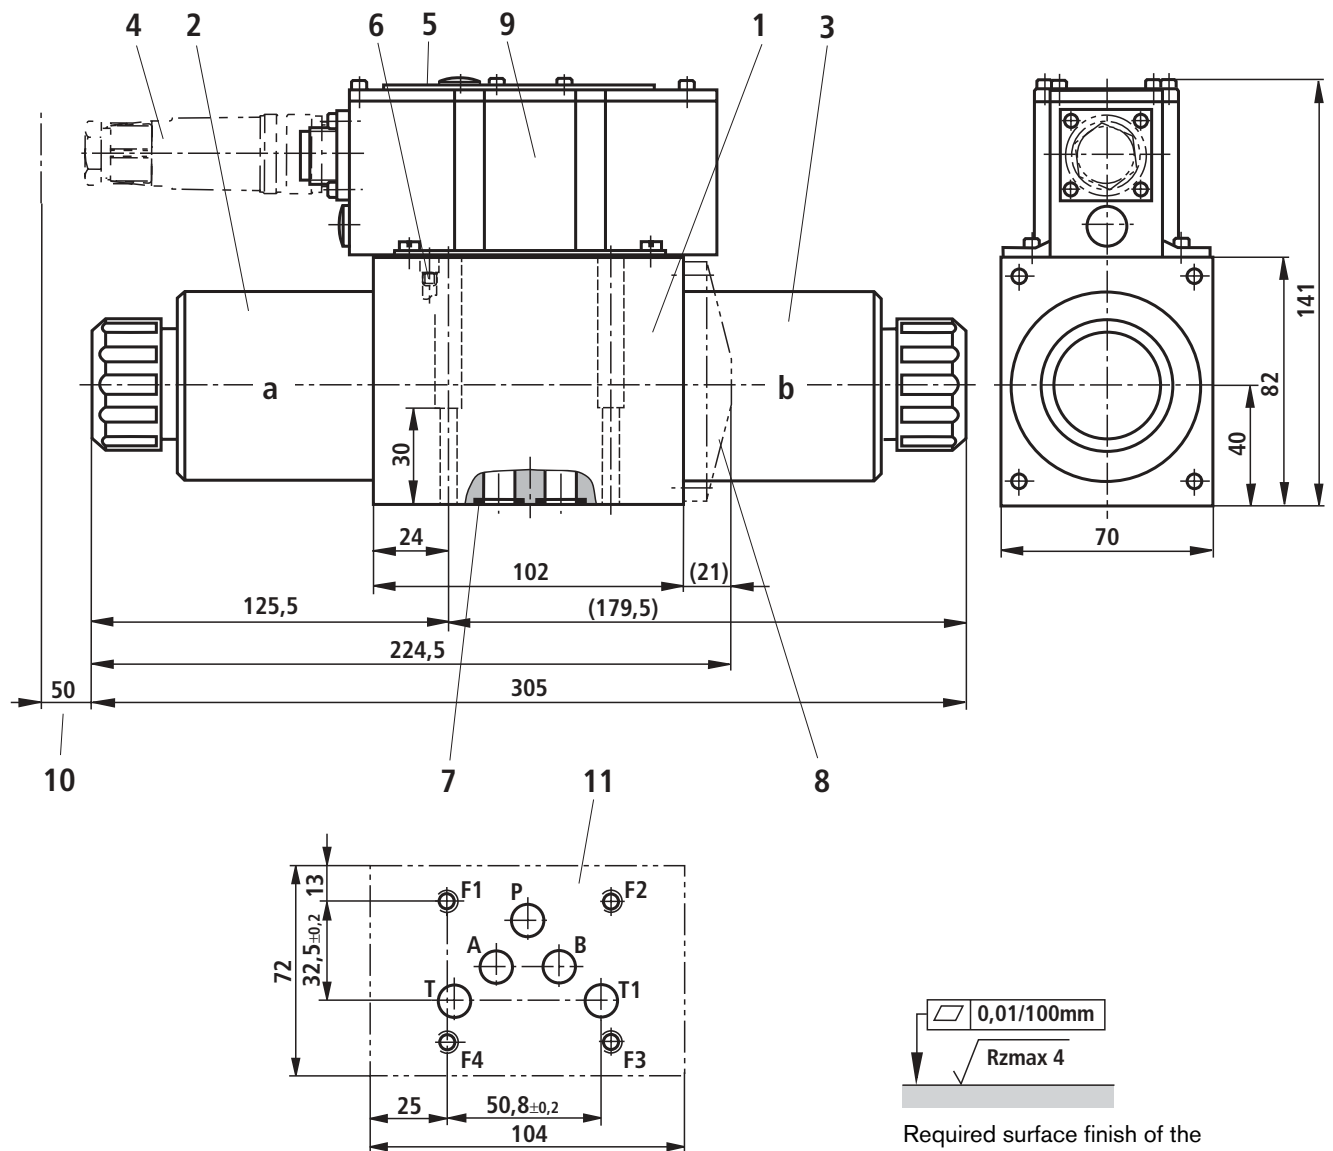

- 1 Valve housing
- 2 Proportional solenoid "a"
- 3 Proportional solenoid "b"
- 4 Plug-in connector to DIN EN 175201-804, separate order, see page 7
- 5 Name plate
- 6 Valve bleed screw  
**Note:** The valves are bled before delivery.
- 7 Identical seal rings for ports A, B, P, T
- 8 Cover for valves with one solenoid (2 switched positions, versions EA or WA)
- 9 Integrated electronics (OBE)
- 10 Space required for the connection cable and to remove the plug-in connector
- 11 Machined valve mounting surface, connection location to ISO 4401 (**with** locating pin hole)  
Code: 4401-05-04-0-94 (explanation to ISO 5783)  
Deviation from the standard: Port T1 Ø11.2 mm

**Tolerances to:** – General tolerances to ISO 2768-mK

Subplates to catalogue sheet RE 45054 and valve fixing screws must be ordered separately.

**Subplates:** G66/01 (G3/8)  
G67/01 (G1/2)  
G534/01 (G3/4)

**Valve fixing screws**(separate order)

The following valve fixing screws are recommended:

– **4 S.H.C.S. ISO 4762 - M6 x 40 - 10.9-flZn-240h-L**  
(friction value  $\mu_{\text{total}} = 0.09$  to  $0.14$ )  
Tightening torque  $M_A = 12.5 \text{ Nm} \pm 10\%$ ,  
Material No. **R913000058** (separate order)

or

– **4 S.H.C.S. ISO 4762 - M6 x 40 - 10.9**  
(friction value  $\mu_{\text{total}} = 0.12$  to  $0.17$ )  
Tightening torque  $M_A = 15,5 \text{ Nm} \pm 10\%$

## Notes

---